

TECHNICAL BULLETIN
3030 - STD
VS
3030X - INTRAAX

JAN 2017

Starting January 2014:


RANGER BRAKE has made a small but important change to our Standard 3030 Tandem / Spring-brake. We have modified the PUSH-ROD LENGTH from 10.5" to a ore versatile **EXPOSED** length of 12.5", to make it mare application friendly...

WARNING:

This simple modification is NOT intended to replace our 3030X-INTRAAX because you will incur increased labor costs in doing so. It just gives you the flexibility to FIELD convert, if in a bind.

Our **RANGER BRAKE** 3030X-INTRAAX unit is Purposefully designed to guarantee a perfect-fit, the first time. It has:

- 1). 0° Stud to Port alignment.
- 2). 0° Clamp-band to Port alignment.

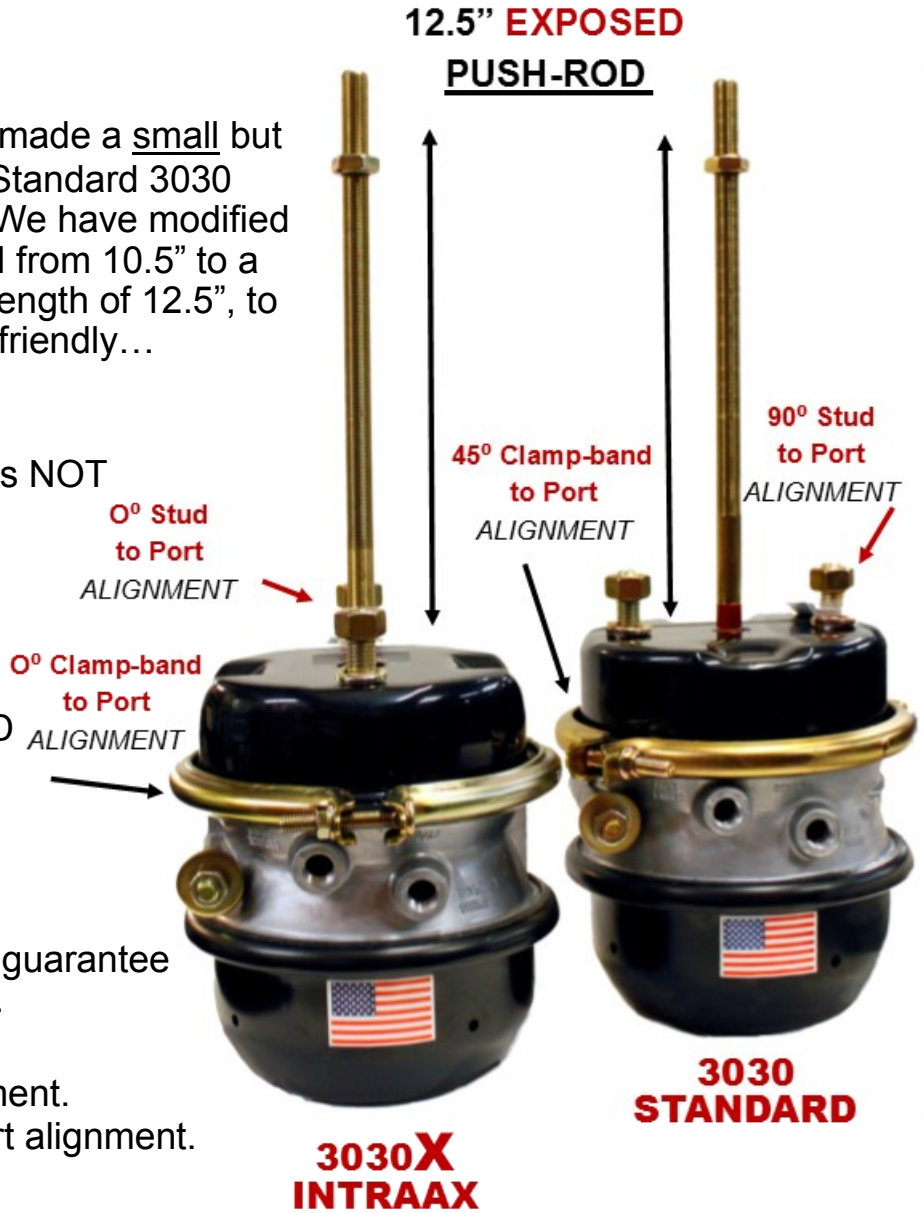

Both required to fit perfectly with your INTRAAX axle. Our perfect-fit 3030X also guarantees to reduce your labor costs when servicing INTRAAX axles.

Technical Support

(615) 536-5020

Fitment Solutions

FOR EASE OF INSTALLATION